ZEVAC HP MINI

ZEVAC MINI-HP
48” x 16” x 16” | 285 lbs
Pressure Range: 0 – 1500 psig

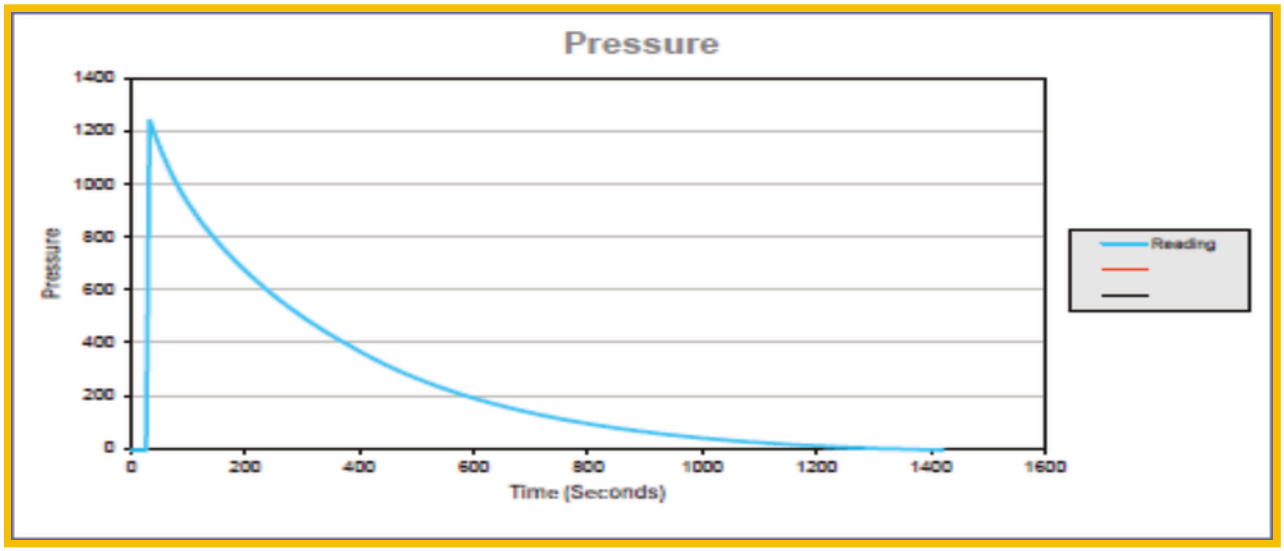

GetZEVAC.com | 918.514.3166 | 7830 S 87th West Ave, Tulsa, OK 74131

ZEVAC

THE PROVEN SOLUTION ANYWHERE VENTING HAPPENS

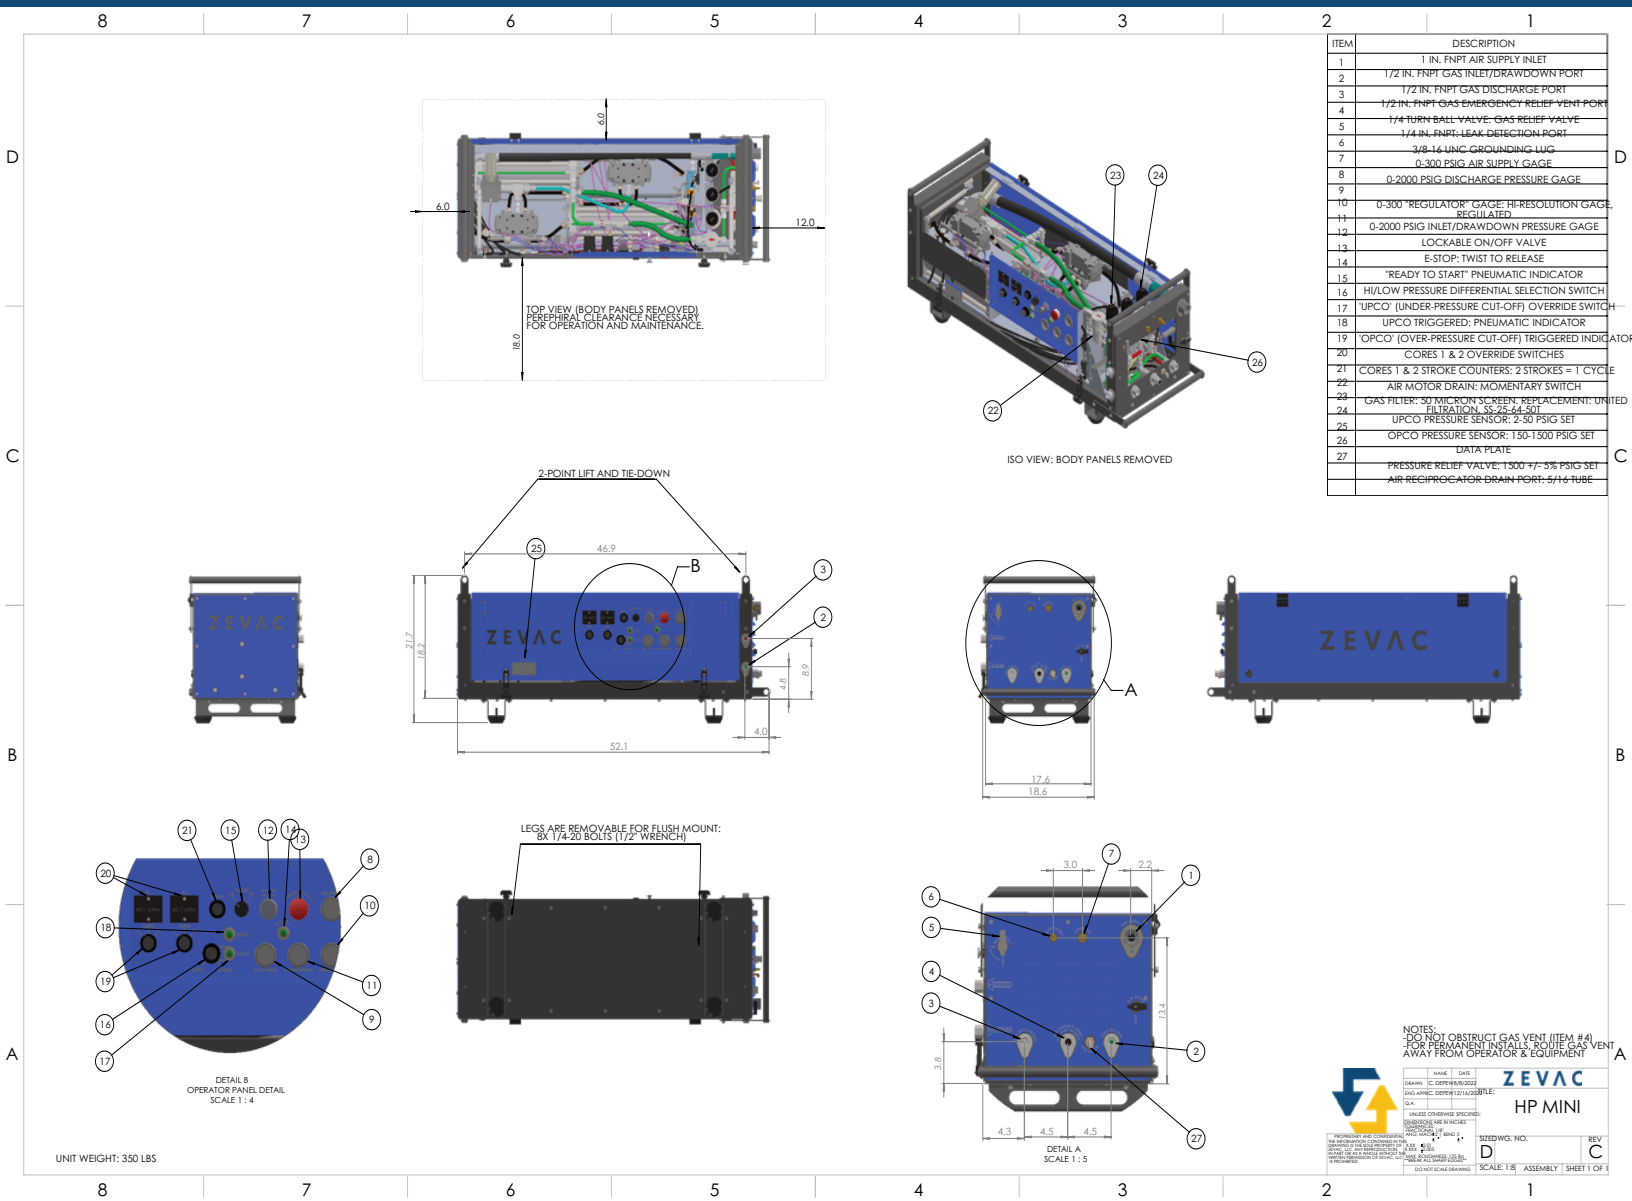

ITEM	DESCRIPTION
1	1 IN. FNPT AIR SUPPLY INLET
2	1/2 IN. FNPT GAS INLET/DRAWDOWN PORT
3	1/2 IN. FNPT GAS DISCHARGE PORT
4	1/2 IN. FNPT GAS EMERGENCY RELIEF VENT PORT
5	1/4 TURN BALL VALVE; GAS RELIEF VALVE
6	1/4 IN. FNPT; LEAK DETECTION PORT
7	3/8-16 UNC GROUNDING LUG
8	0-300 PSIG AIR SUPPLY GAGE
9	0-2000 PSIG DISCHARGE PRESSURE GAGE
10	0-300 "REGULATOR" GAGE; HI-RESOLUTION GAGE, REGULATED
11	0-2000 PSIG INLET/DRAWDOWN PRESSURE GAGE
12	LOCKABLE ON/OFF VALVE
13	E-STOP; TWIST TO RELEASE
14	"READY TO START" PNEUMATIC INDICATOR
15	HI/LOW PRESSURE DIFFERENTIAL SELECTION SWITCH
16	"UPCO" (UNDER-PRESSURE CUT-OFF) OVERRIDE SWITCH
17	UPCO TRIGGERED; PNEUMATIC INDICATOR
18	"OPCO" (OVER-PRESSURE CUT-OFF) TRIGGERED INDICATOR
19	CORES 1 & 2 OVERRIDE SWITCHES
20	CORES 1 & 2 STROKE COUNTERS; 2 STROKES = 1 CYCLE
21	AIR MOTOR DRAIN; MOMENTARY SWITCH
22	GAS FILTER; 50 MICRON SCREEN; REPLACEMENT: UNITED FILTRATION, SS-25-64-50T
23	UPCO PRESSURE SENSOR; 2-50 PSIG SET
24	OPCO PRESSURE SENSOR; 150-1500 PSIG SET
25	DATA PLATE
26	PRESSURE RELIEF VALVE; 1500 +/- 5% PSIG SET
27	AIR RECIPROCATOR DRAIN PORT; 5/16 TUBE

GetZEVAC.com | 918.514.3166 | 7830 S 87th West Ave, Tulsa, OK 74131

ZEVAC